

**QUOTATION NOTICE**

NCRMI invites competitive quotations from interested parties for the work related to the Demonstration project – “Coir geocell system and its application” in the premises of NCRMI campus. The details of work are enclosed.


The quotations shall reach Director, NCRMI on or before 20.06.2019 at 3.00 pm. Quotations will be opened on the same day at 03.30 pm in the presence of the quotationers if any present. The Director, NCRMI reserves the right to accept or reject any or all the quotations without assigning any reason whatsoever.

Director  
NCRMI

To  
NCRMI Notice Board

Sl No.	Particulars	Quantity	Unit	Rate quoted by the contractor	Amount
1	Clearing the plot including uprooting of rank vegetation, grass, removal of rubbish upto a distance of 50 m outside the periphery of the area cleared including surrounding the project site	600	m <sup>2</sup>		
2	Earthfilling with topsoil (including levelling of the slope area at a perfect slope of 38% ):-using available excavated earth (excluding rock)in project plot, layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.	18.75	m <sup>3</sup>		
3	Earth work in surface excavation not exceeding 30 cm in depth but exceeding 1.5 m in width as well as 10 sqm on plan including getting out and disposal of excavated earth upto 50 m and lift upto 1.5 m	159.86	m <sup>3</sup>		
4	Supply of 8mm dia 50cm long MS rod : 1m of 8mm dia ms bar=.395kg	50	nos.		
5	(a) Supply,cutting & fixing of bamboo strips for geocell(size 50x2.5cm) including labour charge for cutting of bamboo strips (b) Supply,cutting & fixing of bamboo strips for geotextile(size 30x2.5cm). including labour charge for cutting of bamboo strips	300 200	nos. nos.		
6	Plastering the damaged portion of sedimentation tank & replacing brass taps(3nos.) Fixing of	LS			

	drainage taps in siltation tank(3nos.)				
7	(a) Supply of 22 guage corrugated sheet of size 3.05 x 0.45	10	nos.		
	(b) Labour charge for fixing corrugated sheet in either side of drain ditch using MS rod.	LS			
8	Painting on drainage sheets, collection drum & accessories and Painting on the board	244.23	m <sup>2</sup>		
9	Filling of available earth in the geocell	10.63	m <sup>3</sup>		
10	Laying of geocell	125	m <sup>2</sup>		
11	Cutting & laying of geotextile	125	m <sup>2</sup>		
	(a) cutting of geotextile				
	(b ) laying of geotextile	125	m <sup>2</sup>		

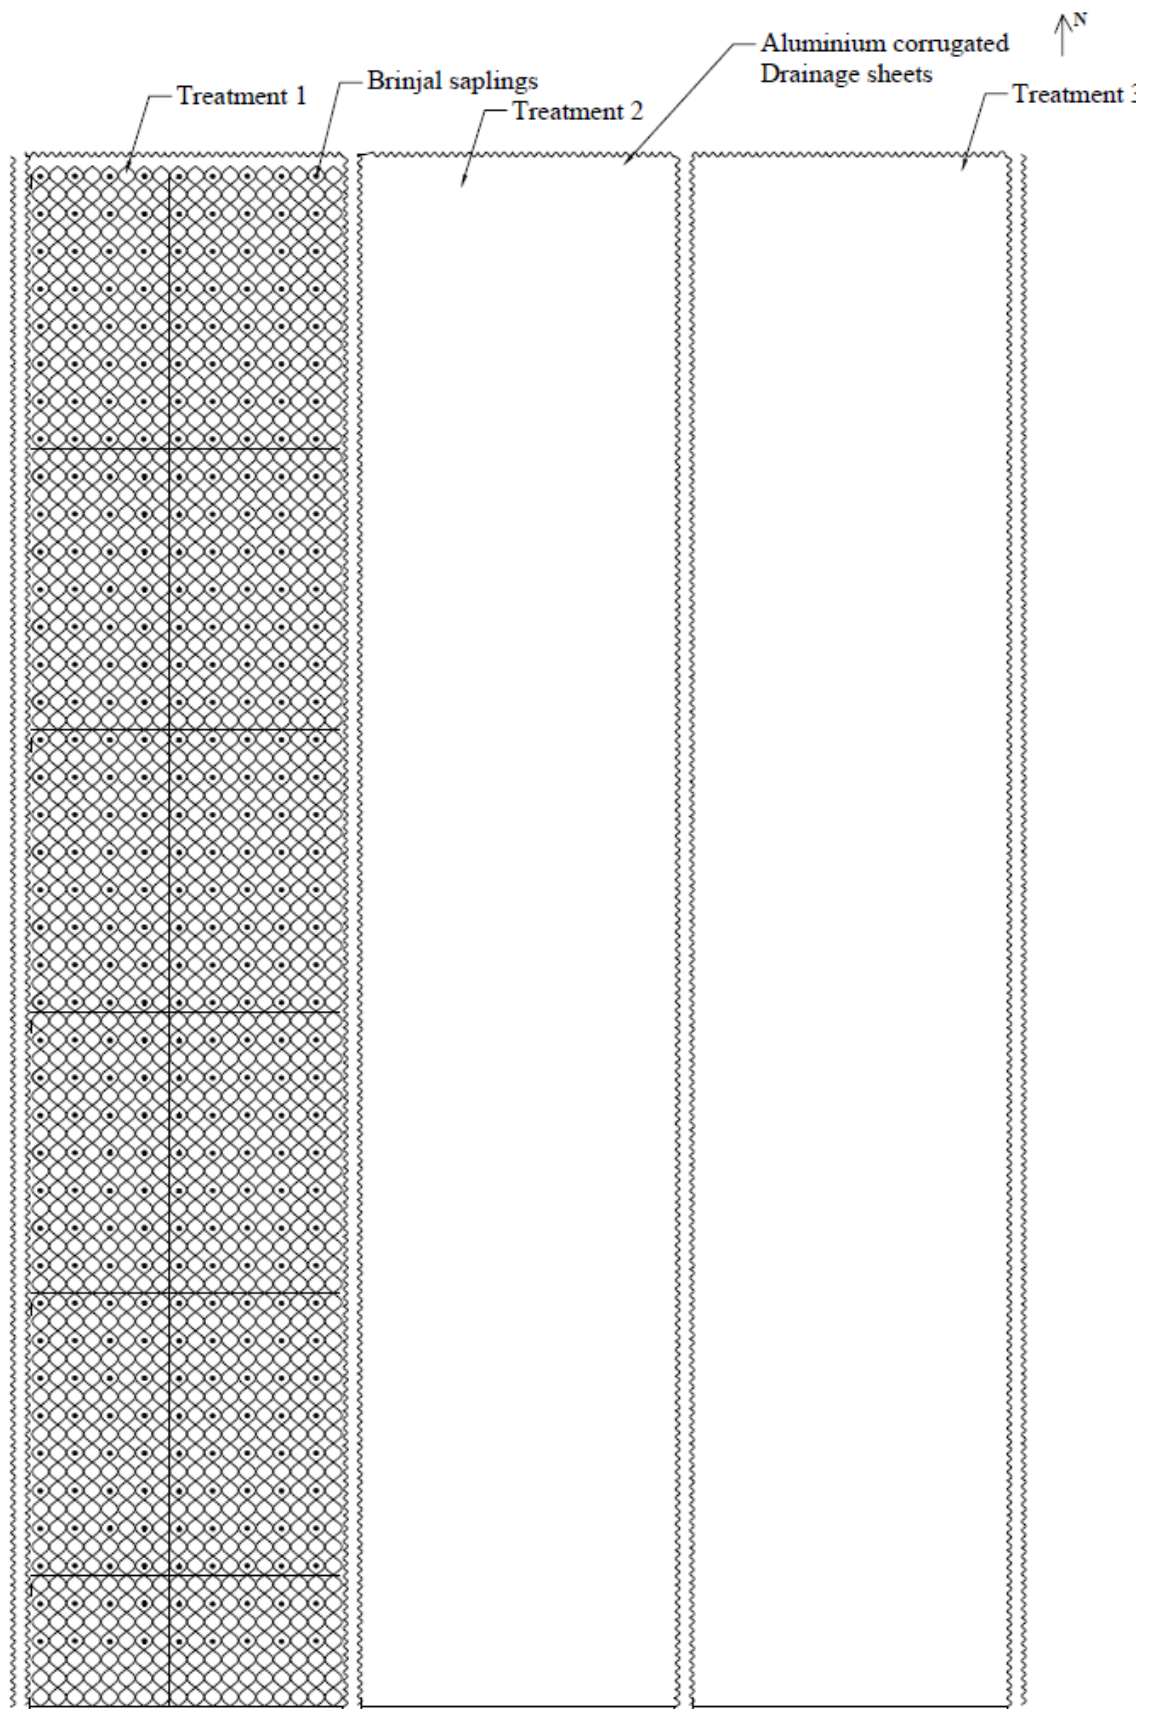

Treatment 1 : Plot with Geocell

Treatment 2 : Control plot

Treatment 3 : Plot with Geotextile

